

Part Number: 5672v, 5616v, 5617v

5600 Series Thin Clients for VDI *Performance Class*

The 5600 Series Thin Clients are designed for knowledge based tasks and content creation. These units combine the power and technology of the industry-leading Intel Atom N270 1.6GHz processor and the smallest form factor unit on the market, making the 5600 Series a well-rounded, high performance and versatile unit for any desktop platform.

Known for its exceptional graphics performance, the 5600 Series allows the user to experience the capabilities of video streaming, rich multi-media content and multiple appliances. The 5600 range also offers the versatility of adding an additional monitor to expand the functionality and performance of the end users experience. These Thin Clients offer impressive features and benefits without compromising the users precious desktop workspace. They also come with a removable stand and an optional VESA mounting bracket allowing the unit to be mounted on the back of the monitor, on a wall or in a cabinet if required, to maximize on space-saving. This fully functional Thin Client is designed for a desktop virtualized environment and allows the user to connect to a variety of servers and virtual desktops.

The Linux Thin Client supports three modes of operation; Desktop Mode, WBT Mode and Kiosk Mode.

▶ Small Form Factor	▶ 802.11 b/g/n Wireless Capable
▶ 1.6GHz Intel Atom for Rich Multi-Media Experience	▶ VESA Mounting Capabilities
▶ Dual Monitor Option	▶ Centralized Management




5600 Series Thin Clients for VDI

5600 Series Models

System	
Management	10ZiG Centralized Management Utility
Form Factor	Ultra Mini
Processor	Intel Atom N270 1.6GHz
Chipset	Intel 945GSE Integrated Graphics Media Accelerator 950
Dimensions	
Device	1.4"(W) x 6.1"(H) x 4.8"(D)
Weight	1.5 lbs
Connections	
Ports	USB x 4, PS2 x 1, Line-Out x 1, Mic-In x 1, Internal Speaker x 1
Video	DVI-I x 1 (VGA Supported with Included Adapter), 1920 x 1200 x 32 (24 on Linux) Bit Color
Networking	
Wireless	Optional Internal Wireless 802.11 b/g/n
Ethernet	10/100/1000 Base-T, PXE
Environmental	
Operating Temp.	32~95F (0~35C), 20-80% non-condensing humidity
Power	12 Watt Consumption, 36 Watt, DC-12V/3A Input

WARRANTY: All Thin Clients include a 3-Year Advanced Warranty

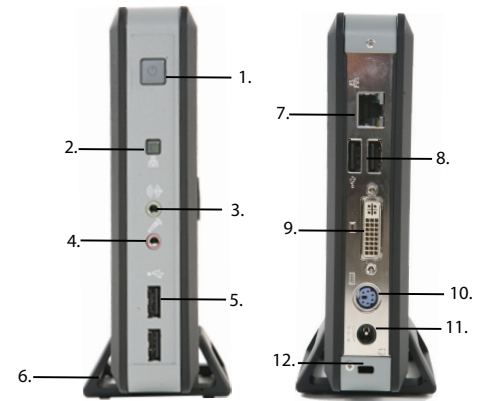

SPECIFICATIONS:

1. Power Button (LED inside)
2. Network Light
3. Audio Out
4. Mic In
5. Front USB (x2)
6. Stand
7. Ethernet 10/100/1000
8. Back USB (x2)
9. DVI Socket
10. PS2 Keyboard Port
11. Power
12. Kensington Lock

	5672v	5616v	5617v
Operating System	10ZiG Linux	WES 2009	WES7
Memory			
RAM	MIN: 1GB MAX: 2GB	MIN: 1GB MAX: 2GB	MIN: 2GB MAX: 2GB
Storage	MIN: 512MB MAX: 1GB	MIN: 2GB MAX: 16GB	MIN: 4GB MAX: 16GB
Software			
Software Applications	Firefox, Citrix Receiver, RDP, Sun JVM, VNC, Adobe Flash	Internet Explorer, Citrix Receiver, RDP, Sun JVM, VNC, Adobe Flash	Internet Explorer, Citrix Receiver, RDP 8 , Sun JVM, VNC, Adobe Flash
VDI Connection Brokers	Citrix XenDesktop with HDX, VMware View with PCoIP, VDI-In-a-Box, RedHat, 2X, Quest vWorkspace, Ericom, Leostream	Citrix XenDesktop with HDX, VMware View with PCoIP, VDI-In-a-Box *, Red Hat Spice & Virtual Bridges Verde Client	Citrix XenDesktop with HDX, VMware View with PCoIP, VDI-In-a-Box *, Red Hat Spice & Virtual Bridges Verde Client

* Optional VDI Brokers Available: Quest vWorkspace, Ericom, Leostream, RedHat, 2X



[linkedin.com/company/10ZiG-Technology](https://www.linkedin.com/company/10ZiG-Technology)



www.facebook.com/10ZiGTechnology



[@10zigtechnology](https://twitter.com/10zigtechnology)



10ZiG.com/smpk

sales@10ZiG.com • (866) 865-5250

www.10ZiG.com